





Turning Power into Motion.
Product Catalogue.

Linde Hydraulics

Linde

Our media at a glance.
All documents can be found in the download area of our website.



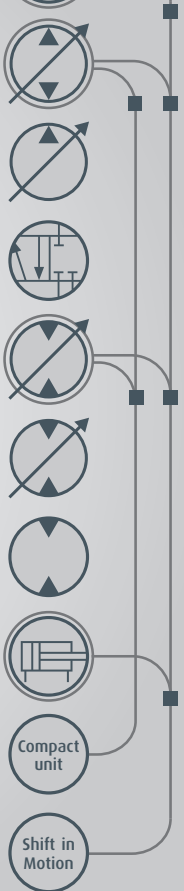


 PRODUCT CATALOGUE	 DATASHEETS	 BROCHURES	 FACT SHEETS	CAD DOWNLOADS
General technical data.	General technical data.	General technical data.	General technical data.	3D models in *.stp file.
Design characteristics & Product advantages.	Design characteristics & Product advantages.	Design characteristics & Product advantages.	Design characteristics & Product advantages.	
Portfolio overview.	Technical specification.	Application examples.	Application examples.	
	Functional descriptions.			



LEARN MORE
MEDIA & DOWNLOADS

Linde Hydraulics Product Catalogue. Content.



OUR SERVICES		Linde Hydraulics Lifecycle.		
ELECTRONICS		Controllers & Diagnostics.		
HIGH PRESSURE HYDRAULICS	PUMPS	Variable displacement.		
		Self-regulating.		
	CONTROL VALVES	Monoblock & Modular.		
	MOTORS	Variable displacement.		
		Self-regulating.		
		Fixed displacement.		
	ACTUATORS	Shift actuator.		
	SYSTEMS	Pump/Motor - Compact unit.		
		Shift in Motion.		
	LINDE HYDRAULICS WORLDWIDE			Sales & Service partners.



LEARN MORE
MEDIA & DOWNLOADS

Our Services. Linde Hydraulics Lifecycle.



Inquiry & Layout

Regardless of whether you contact us in person or by other means, with us you will always find your solution as quickly as possible.

Linde Hydraulics offers you a wide range of solutions for your construction, forestry or agricultural machinery. Get an overview on our website. In the download area you will not only find layout examples for your application, but also data and fact sheets with technical details of our portfolio. In addition, 3D (step) models of our products can be used to determine the required installation space. A global network of sales partners always offers you a local contact person - together with our team of application engineers we will support and verify your layout.

→ You can find a **sales partner** close to you on our website at www.linde-hydraulics.com/worldwide



Development & Application Engineering

Regardless of whether you need standard or customized solutions, our engineers will develop what brings you forward – under all operating conditions.

Benefit from our expertise and the wealth of experience of our engineers in every step of the product development process:

- Common product development
- Worldwide project support
- Pulse and endurance testing beyond the application requirements
- Customized project coaching
- System training for specific applications





LEARN MORE
iCon®

Electronics. Controllers. iCon®.

Product advantages

- Cost-efficient configuration of manifold functions: from simple controls to complex and safety-critical systems
- Software with customer-specific adaptations
- Short development cycles
- Demand-oriented extension and simple implementation in overall vehicle network



Fields of application



iCon	
Simple controls	
Underspeed control	
Dual path drive	
On-road drive	
Complex controls	


	iCon 100	iCon 200	iCon 300
Simple controls	✓	✓	✓
Underspeed control	✓	✓	✓
Dual path drive		✓	✓
On-road drive		✓	✓
Complex controls			✓

General technical data

	Controller		
	Safety level	Function	Safety
iCon 100	PLb	✓	
iCon 200	PLd	✓	✓
iCon 300	PLd	✓	✓

Connector		Outputs						Inputs						Com. Interfaces			
42 Pin	70 Pin	HighSide Out, max. 3 A	HighSide Out (switched in groups)	LowSide Out	LowSide current controller	LowSide current controller for side A and B	Ext. power supply, 5 V, max. 250 mA	Analog In, 0-5 V	Frequency In, 0-10 kHz	Inductive sensors (frequency)	PWM In	Digital PullUp	Digital PullDown	Ignition	CAN	RS232	USB
✓		3	n/a	3	2	n/a	1	6	5	1	n/a	13	n/a	1	2	n/a	n/a
✓		7	n/a	n/a	4	4	1	6	5	1	n/a	2	n/a	1	2	n/a	n/a
	✓	8	1	2	8	n/a	2	12	4	1	2	6	4	1	3	1	option.

Electronics. Diagnostics. iDiag®.

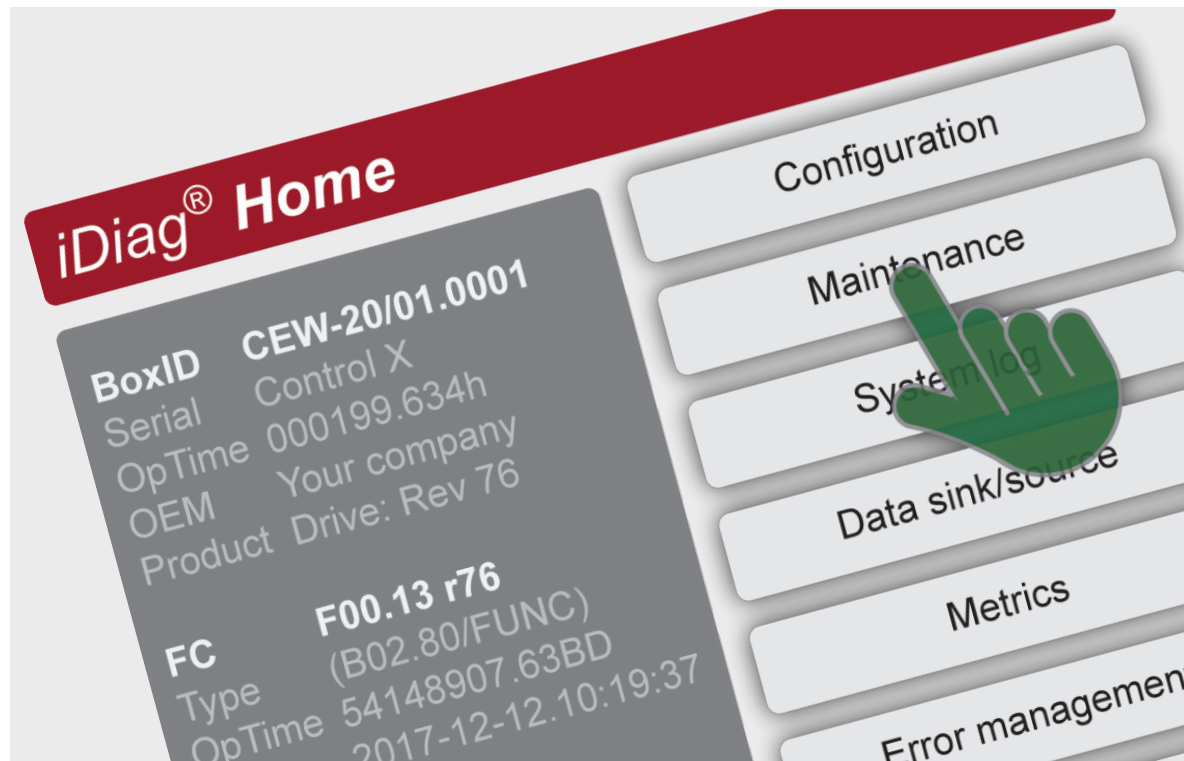

Design characteristics

- Diagnostic system compatible with iCon Controllers
- Parameterization
- "Teach in" of components
- Harness checking
- Data logger suited for PC/laptop with Windows operating system with serial or USB interface

Product advantages

- Optimum system usage by teach-in function
- Efficient trouble shooting
- Easy usage by self-explanatory user surface
- Practical-minded partition of control elements by functional groups
- Modular set-up: individual functions can be added optionally later

Modern machines benefit from the advantages provided by an intelligent electronic control: Increased comfort, machine variants realised by software instead of differing components and a further reduction of fuel consumption and emissions. Linde Hydraulics accompanies this development from the very beginning and complements the components of the power-train with electronic products of the iCon® family, in the accustomed quality and reliability.



LEARN MORE
IDIAG®



Closed Circuit. Variable Displacement Pump. HPV-02.


Design characteristics

- Axial piston pump in swashplate design
- Clockwise or counter clockwise rotation
- Integrated high pressure relief valves with charge function
- Hydrostatic plain bearing of the swashplate

Product advantages

- Precise and load-independent
- High power density
- Long service life

All the controls used in the Series 02 are based on a load-independent control mechanism. No matter which control is used: identical commands always result in the same response in the machine. The sensitive and precise machine control makes work easier and increases productivity. Various customer system options for mechanical, hydraulic and electric input solutions are available. Further special regulating features like torque control and pressure cut-off are also available. The reliable control of the pump can easily be integrated into any kind of vehicle management control system.

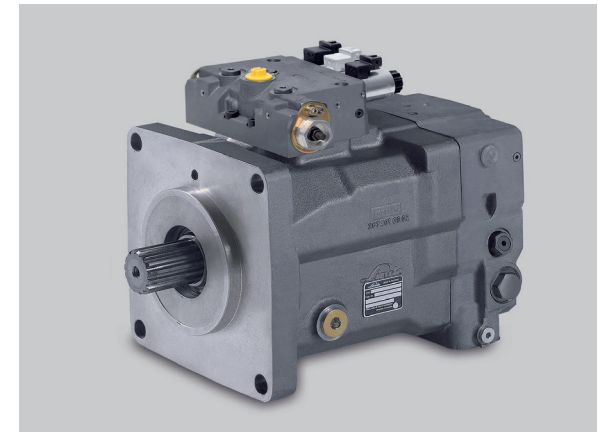

General technical data

HPV-02										
Nominal size			55	75	105	135	165	210	280	
Displacement	Max. displacement	cc/rev	54.7	75.9	105	135.7	165.6	210.1	281.9	
	Max. operating speed	rpm	3900	3400	3200	3000	2750	2300	2400	
Speed	Max. speed*	rpm	4150	3600	3400	3200	2950	2500	2550	
	Nominal pressure	bar	450	450	450	450	450	450	450	
Pressure	Max. pressure**	bar	500	500	500	500	500	500	500	
	Max. housing pressure	bar	2.5	2.5	2.5	2.5	2.5	2.5	2.5	
	Torque	Torque ($\Delta p=430$ bar; charge press.=20 bar)	Nm	374	519	719	929	1133	1438	1929
Corner power (theor.)	$(V_{max} \times n_{max} \times \Delta p / 430 \text{ bar})$		kW	153	185	241	292	326	346	485
Weight (approx.)***	(with H1-control, without oil)		kg	46	49	66	72	113	132	164

Customer interfaces


	Control options****					Sensors		Flanges						Shafts****			PTO	Ports		
	Proportional	3-Position	Pressure cut-off	Enable function	Torque Control	Swash angle	Pressure	2 hole	2 hole, 4 additional threads M12	2 hole, 4 additional threads M16	2 hole, additional holes (d=17,5mm)	4 hole	ISO 3019-1 (SAE)744) ANSI B92.1-1970	Companion flange SAE J1946 Typ A	DIN 5480	Power take-off	Work ports	ISO 6162-2 Radial twin ports	ISO 6149-1	
Electro-hydraulic	✓	✓	✓	✓	✓	✓	✓	SAE-B					✓	✓	✓	✓		✓		
Hydraulic	✓	✓	✓	✓	✓	✓	✓	SAE-C	✓	✓										
Mechanic	✓			✓				SAE-D	✓		✓	✓								
								SAE-E				✓							✓	

* highest transient speed, that can temporarily occur | ** highest transient pressure, that can temporarily occur | *** inclusive internal gear pump (size 55-135) or external gear pump (size 165-280) | **** Availability depends on nominal size



LEARN MORE
HPV-02

Open Circuit. Self-Regulating Pump. HPR-02.

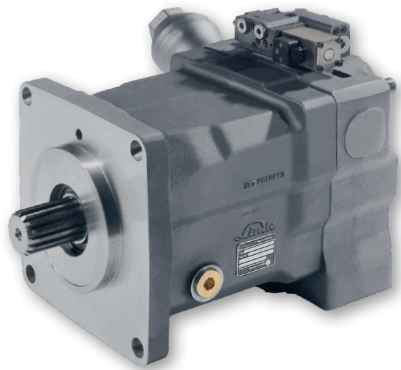

Legal emission regulations force manufacturers of mobile machinery to optimize the noise emission of their products. Since secondary measures tend to be expensive and less efficient Linde Hydraulics prefers to fight the noise where it is generated: by optimally connecting an additional volume directly next to the commutation of the HPR-02 pump, Linde Hydraulics invented the SPU silencer. The adaptive SPU reduces pressure pulsations in the regulating pump over the entire range of operation – without loss of power.

Design characteristics

- Axial piston pump in washplate design
- Exact controllers with and without position feedback
- Adaptive noise optimization SPU
- Hydrostatic plain bearing of the swashplate

Product advantages

- Excellent suction up to rated speed
- High power density
- Energy saving operation by 'flow on demand'-control

General technical data

HPR-02		
Nominal size		
Displacement	Max. displacement	cc/rev
Speed	Max. operating speed (without tank pressurization)	rpm
Volume flow	Max. volume flow*	l/min
Pressure	Nominal pressure	bar
	Max. pressure**	bar
	Max. housing pressure	bar
Torque	Torque	Nm
Corner power (theoretical)		kW
Weight (approx.) (without oil)		kg

55	75	95	105	135	165	210	280
55	75.9	94.7	105	135.7	163.6	210.1	281.9
2700	2500	2500	2500	2350	2400	2100	2000
148.5	189.8	237.5	246.8	312.1	392.6	441.2	563.8
420	420	350	420	420	350	420	420
500	500	420	500	500	420	500	500
2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
368	507	528	702	907	911	1404	1884
104	132.8	138	172.7	218.5	229	308.8	394.7
39	39	44.5	50	65	74	116	165


105 D	125 D	165 D
210	2x125	2x165
2450	2400	2100
514.5	600.0	695.5
420	350	420
500	420	500
2.5	2.5	2.5
1245	1393	1964
319.4	337	431.8
96	113	177

	Control options****					
	pressure cut-off	hydraulic APLS - override	electrical APLS - override	electric stroke limiter and pressure cut-off	hyperbolic power limiter	hyperbolic power limiter and pressure cut-off
Load sensing	✓	✓	✓	✓	✓	
Electro-proportional						✓

Sensors	
Swash angle	Speed sensor
✓	

Shafts****		
ISO 3019-1 (SAE) 7444 ANSI B92.1-1970	Compagnon flange SAE J 1946 Typ A	DIN 5480
✓	✓	✓

* theoretical data of a single unit without efficiency effects | ** highest transient pressure, that can temporarily occur | **** Availability depends on nominal size

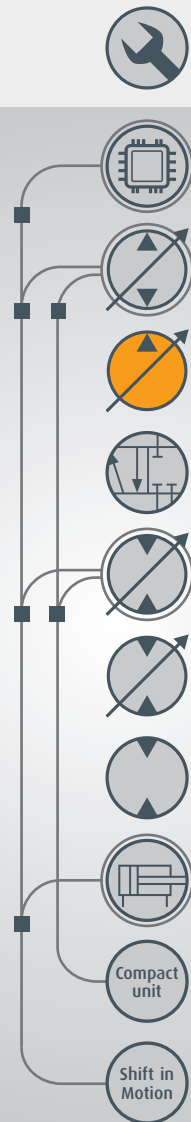

LEARN MORE
HPR-02

Open Circuit. Monoblock Control Valves.

Design characteristics

- Basic block: three directional control valves of identical nominal size in one cast housing
- Designed for the Linde Synchron Control (LSC) - Load Sensing System
- Nominal sizes 30, 25 and 18
- Flows up to 600 l/min (size 30)
- Broad dimensioned diameters and flow-optimized design of the supply channels
- Extendable with directional control valves in sandwich design, in identical or differing nominal size
- Pressure cut-off and additional functions integrated in connection plate
- Special functions via intermediate plates
- Optionally with hydraulic or electric piloting


Product advantages

- All advantages of the LSC valve technology
- Compact design
- Full-size expandability
- High efficiency achieved by flow-optimized channels even for applications with numerous actuators


Three directional control valves in a common housing form the base of the manifold valve plate in monoblock design. This results in the most compact package.

With its latest LSC generation, Linde Hydraulics combines the design characteristics of the proven LSC system with the benefits of the electric control. The powerful electronic control unit recognises the operator's command by the amplitude and the speed with which the joysticks are being moved. It then sets the pump and the valves according to the dynamic demand. Due to the overlaid, classic load-sensing control mechanism, no sensors are needed.

All components are provided by a single source and matched perfectly with each other. The operator can change the system's behaviour electronically with regard to its dynamics and fine control, as well as its dependency or independency on the load. This enables multi-purpose machines which can quickly be optimized to the specific use by the operator. With completely opened valves, the actuators can be controlled exclusively via the pump's control to achieve the maximum possible efficiency.

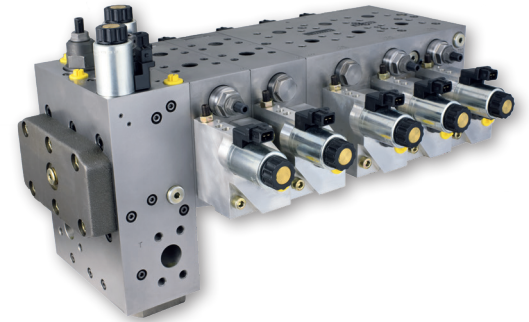

LEARN MORE
MONOBLOCK

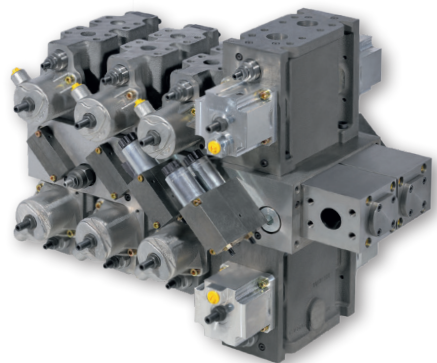

Manifold valve plates of series VT modular are made up of individual components of a modular building block system. This is why manifold valve plates can be configured to optimally match any application with one up to eight actuators.

The directional control valves are at the core of every manifold plate in LSC technology. Compared to other load sensing directional control valves, LSC directional control valves stand apart, in particular, thanks to the integrated downstream pressure compensators and pressure copiers. This arrangement prevents the actuator from lowering when the function starts.

As a result of the compact design, the oil flow only needs to pass through the valve once and not several times. This ensures optimized flow passages in the directional control valve. Due to the high-precision production of the directional control valves, there is only minimal leakage even at high load, which is beneficial to the load holding function of the valves.

Open Circuit. Modular Control Valves.

Design characteristics

- Directional control valves available as sub plate mounted valves
- Designed for the Linde Synchron Control (LSC) – Load Sensing System
- Nominal sizes 25 and 30
- Flows up to 600 l/min (size30)
- Modular design for the configuration of valve plates for 1-8 actuators
- Optionally with hydraulic, electric or combined piloting


Product advantages

- All advantages of the LSC valve technology
- Easy to configure building block system
- Adjustable to the target application
- Quick availability
- Ideal for machines with low production volume



LEARN MORE
VT MODULAR

Variable Displacement Motor. HMV-02.

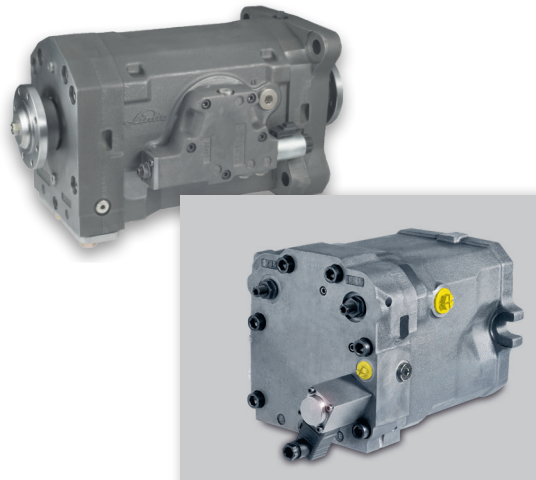

Standard hydraulic motors at low speeds in their starting phase cannot generate the necessary torque. Therefore, the power of the fast spinning hydraulic motors has to be reduced by means of several step gearboxes down to the speed needed on the wheel. Somewhat higher windage losses and poorer mechanical efficiency are benevolently accepted in this context. Quite the opposite holds true for the motors by Linde Hydraulics: The motors of the Series 02 are capable of transmitting the required torque even at low speed and make it possible to start smoothly and sensitively.

Design characteristics

- Axial piston motor in washplate design
- Optimized starting and low speed behaviour
- Swivelling to 0 cc/rev
- Hydrostatic plain bearing of the washplate

Product advantages

- PTO through-drive motor
- Jerk-free low speed
- Large conversion range
- Extremely high angular acceleration possible

General technical data

HMV-02		
Nominal size		
Displacement	Max. displacement	cc/rev
Speed	Max. operating speed at V_{max}	rpm
	Max. speed at V_{max}^*	rpm
	Max. operating speed at V_{min}	rpm
	Max. speed at V_{min}^*	rpm
	Pressure	Nominal pressure
Pressure	Max. pressure**	bar
	Max. housing pressure	bar
	Torque	Output torque ($\Delta p=430$ bar and V_{max})
Corner power	($V_{max} \times n_{max}$ at $V_{min} \times \Delta p$ 430 bar)	kW
Weight	approx. (without oil)	kg

	55	75	105	135	165	210	280
Displacement	54.7	75.9	105	135.6	165.6	210	281.9
Max. operating speed at V_{max}	4300	3800	3700	3200	3100	2700	2400
Max. speed at V_{max}^*	4400	4100	3800	3500	3400	3000	2700
Max. operating speed at V_{min}	4700	4400	4100	3700	3500	3200	2900
Max. speed at V_{min}^*	5300	5000	4700	4000	3900	3500	3200
Nominal pressure	450	450	450	450	450	450	450
Max. pressure**	500	500	500	500	500	500	500
Max. housing pressure	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Output torque ($\Delta p=430$ bar and V_{max})	374	519	719	928	1133	1438	1929
($V_{max} \times n_{max}$ at $V_{min} \times \Delta p$ 430 bar)	184	239	309	360	415	482	586
approx. (without oil)	28	32	42	56	76	101	146

	105 D	165 D
Displacement	210	331.2
Max. operating speed at V_{max}	3300	2900
Max. speed at V_{max}^*	3400	3100
Max. operating speed at V_{min}	4100	3500
Max. speed at V_{min}^*	4400	3700
Nominal pressure	450	450
Max. pressure**	500	500
Max. housing pressure	2.5	2.5
Output torque ($\Delta p=430$ bar and V_{max})	1437	2267
($V_{max} \times n_{max}$ at $V_{min} \times \Delta p$ 430 bar)	677	878
approx. (without oil)	98	149

	Control options					
	Proportional	2-Position	default= V_{min}	default= V_{max}	Pressure override	Pressure side selection
Electro-hydraulic	✓	✓	✓	✓	✓	✓
Hydraulic	✓	✓	✓	✓	✓	✓

Sensors	
Speed	✓


Flanges		
	2 hole	4 hole
SAE C	✓	
SAE D	✓	
SAE E		✓

Shafts****		
ISO 3019-1 (SAE J 744) ANSI B92.1-1970	Compagnon flange SAE J 1946 Typ A	DIN 5480
✓	✓	✓

Through drive
Only for nominal sizes 105, 135, 165, 210, 280, 105D, 165D
✓

Ports****			
	ISO 6162-2 Radial	ISO 6162-2 Axial	ISO 6149-1
Work ports	✓	✓	
Threaded ports			✓

* highest transient speed, that can temporarily occur | ** highest transient pressure, that can temporarily occur | **** Availability depends on nominal size

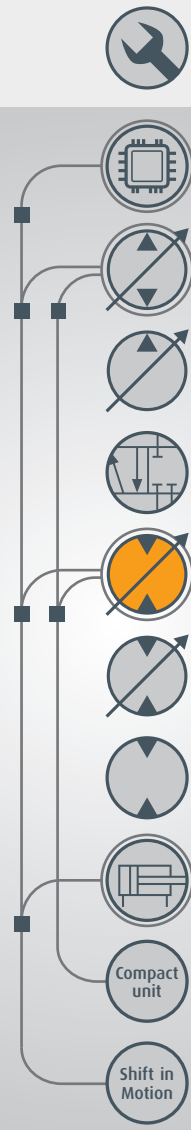

LEARN MORE
HMV-02

Open & Closed Circuit. Self-Regulating Motor. HMR-02.


Design characteristics

- Axial piston motor in swashplate design
- High pressure relief valves available
- Brake pressure shut off for closed circuit
- Hydrostatic plain bearing of the swashplate

Product advantages

- High power density
- Dynamic response
- High reliability

In conventional drives the torque of the hydraulic motor can be transmitted to the cardan shaft only by means of a dropbox. For further optimization of the drive train Linde Hydraulics developed the Through-Drive Motor. Based on the standard hydraulic motor of the Series 02 with just one shaft end, the Through-Drive Motor offers two shaft ends to transmit the torque. Hence the machine designer can conceive the hydraulic motor to fit directly and immediately into the drive train thus saving mounting space. The dropbox usually needed in a conventional propulsion drive can be omitted. This reduces both noise emission and fabrication cost of the entire vehicle while overall efficiency increases.

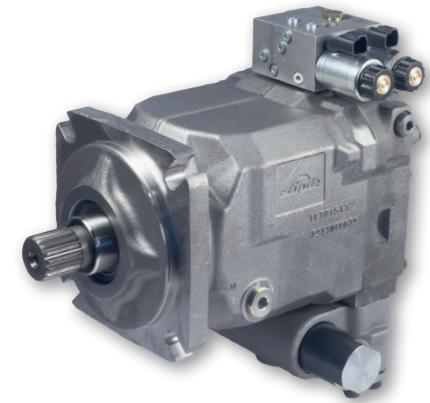

General technical data

HMR-02									
Nominal size			55	75	105	135	165	210	280
Displacement	Max. displacement	cc/rev	54.7	75.9	105	135.6	165.6	210.1	281.9
	Max. operating speed at V_{max}	rpm	4300	3800	3700	3200	3100	2700	2400
Speed	Max. speed at V_{max}^*	rpm	4400	4100	3800	3500	3400	3000	2700
	Max. operating speed at V_{min}	rpm	4700	4400	4100	3700	3500	3200	2900
	Max. speed at V_{min}^*	rpm	5300	5000	4700	4000	3900	3500	3200
	Nominal pressure	bar	450	450	450	450	450	450	450
Pressure	Max. pressure**	bar	500	500	500	500	500	500	500
	Max. housing pressure	bar	2.5	2.5	2.5	2.5	2.5	2.5	2.5
	Output torque ($\Delta p=430$ bar and V_{max})	Nm	374	519	719	928	1133	1438	1929
Corner power	($V_{max} \times n_{max}$ at $V_{min} \times \Delta p$ 430 bar)	kW	184	239	309	360	415	482	586
Weight	approx. (without oil)	kg	28	32	42	56	76	101	146

Customer interfaces

	Control options						Sensors		Flanges			Shafts****			Through drive	Ports****			
	Proportional	2-Position	default=Vmin	default=Vmax	Pressure override	Pressure side selection	Speed		SAE C	2 hole	4 hole	ISO 3019-1 (SAE J744) ANSI B92.1-1970	Companion flange SAE J 1946 Typ A	DIN 5480	Only for nominal sizes 135, 165, 210	Work ports	ISO 6162-2 Radial	ISO 6162-2 Axial	ISO 6149-1
Electro-hydraulic		✓	✓		✓	✓	✓		✓	✓		✓	✓	✓	✓		✓		
Hydraulic		✓	✓		✓					✓	✓								✓

* highest transient speed, that can temporarily occur | ** highest transient pressure, that can temporarily occur | **** Availability depends on nominal size



LEARN MORE
HMR-02

Open & Closed Circuit. Fixed Displacement Motor. CMF.

Design characteristics

- Fixed displacement bent axis motor
- Standardized interfaces
- Plug-in flange available

Product advantages

- High power density
- High speeds
- Very small dimensions

With the next generation of the bent axis motors, Linde Hydraulics expands its customer oriented portfolio of high-quality components for hydraulic systems. The fixed displacement motor CMF is characterized by its high external load and speed capacity. Due to its standardized interfaces, e.g. the plug-in flange according to ISO, the CMF fits a high variety of applications, without the need of adaptors. Low windage losses in combination with the low weight of the motor support the cost-effective operation of the application.



General technical data

CMF			80
Nominal size			80
Displacement		cc/rev	80
Speed	Max. operating speed	rpm	4500
	Max. speed*	rpm	5000
Pressure	Nominal pressure	bar	450
	Max. pressure**	bar	500
	Max. housing pressure	bar	2.5
Torque	($\Delta p=430$ bar; charge press.=20 bar)	Nm	547
Corner power (theor.)	($V_{max} \times n_{max} \times \Delta p$ 430 bar)	kW	258
Weight (approx.)***	(without oil)	kg	23.0

Customer interfaces


Sensors		Flanges			Shafts****			Ports****					
Speed		ISO 3019-1 / SAE J744, SAE C 4-bolt: 127-4	ISO 3019-2 metric, 140 mm, 4-bolt	Plug-in, similar to ISO 3019-2, 190 mm, 2-bolt	ISO 3019-1 (SAE J 744) ANSI B92.1-1970	Compagnion flange SAE J 1946 Typ A	DIN 5480	ISO 6162-2 Radial twin ports	ISO 6162-2 Side ports	ISO 6149 - 1			
✓		✓	✓	✓	✓	✓	✓	Work ports	✓	✓			
								Threaded ports			✓		

* highest transient speed, that can temporarily occur | ** highest transient pressure, that can temporarily occur | **** Availability depends on nominal size



LEARN MORE
CMF

Open & Closed Circuit. Fixed Displacement Motor. HMF-02/HMA-02.

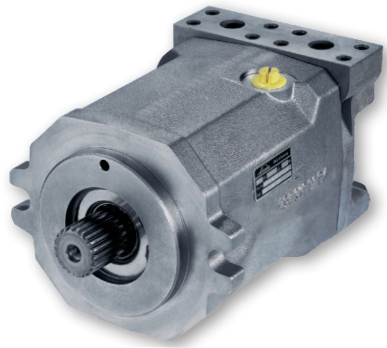

Design characteristics


- Fixed displacement swashplate motor
- High pressure relief valves set fixed or variable opt.
- Robust and simple design
- Hydrostatic plain bearing of the swashplate

Product advantages

- Steady low speed
- High power density
- Reliable and easy to maintain

General technical data

HMF-02/HMA-02			28	35	55	63	75	85	105	135	165	210	280	
Nominal size														
Displacement		cc/rev	28.6	35.6	54.7	63	75.9	85.6	105	135.6	165.6	210	281.9	
Speed	Max. operating speed		rpm	4500	4500	4100	3900	3800	3600	3500	3200	3100	2700	2400
	Max. speed*		rpm	4800	4800	4400	4200	4100	3850	3800	3500	3400	3000	2700
Pressure	Nominal pressure		bar	450	450	450	450	450	450	450	450	450	450	450
	Max. pressure**		bar	500	500	500	500	500	500	500	500	500	500	500
	Max. housing pressure		bar	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Torque		($\Delta p=430$ bar; charge press.=20 bar)	Nm	196	244	374	431	519	586	719	928	1133	1438	1929
Corner power (theor.) ($V_{max} \times n_{max} \times \Delta p$ 430 bar)		kW	92	115	161	176	207	221	263	311	368	407	485	
Weight (approx.)*** (without oil)		kg	16	16	19	24	26	33	33	39	76	101	146	

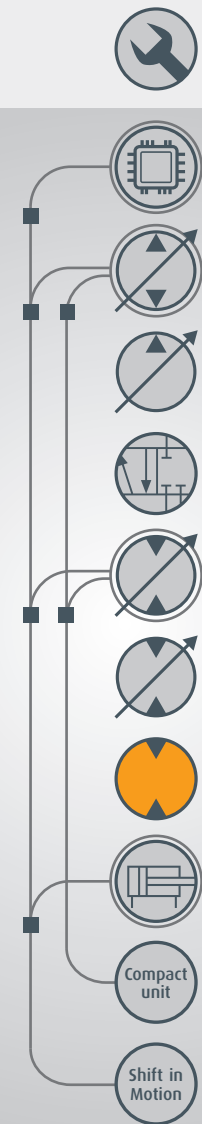

Customer interfaces

Sensors		Flanges			Shafts****			Through drive	Ports****		
Speed	✓	SAE B	2 hole	4 hole	ISO 3019-1 (SAE J 744) ANSI B92.1-1970	Compagnon flange SAE J 1946 Typ A	DIN 5480	Only for nominal sizes 210, 280	Work ports	ISO 6162-2 Radial	ISO 6149 - 1
		SAE C	✓								
		SAE D	✓								
		SAE E		✓							
		Threaded ports		✓							

* highest transient speed, that can temporarily occur | ** highest transient pressure, that can temporarily occur | **** Availability depends on nominal size



LEARN MORE
HMF-02 / HMA-02

Closed Circuit. Shift Actuator. Actuator.


Design characteristics

- Electro-hydraulic multi-position cylinder (3 positions)
- Prepared for mounting of clevis or spherical head
- Simple and robust design

Product advantages

- Defined and exact switching operations
- Easy implementation in conventional gearboxes
- Small space requirement and high reliability

The use of hydraulic cylinders for shifting gears requires not only fast and precise shifting processes, but also defined and electronically sensible rest positions as well as a defined behavior in case of system failure. The actuator from Linde Hydraulics combines all these properties and accommodates them in a robust and compact housing. Together with the shift rod, which is prepared to accommodate conventional connections, all requirements for easy implementation are met. More information can be found in the "Shift in Motion" section.

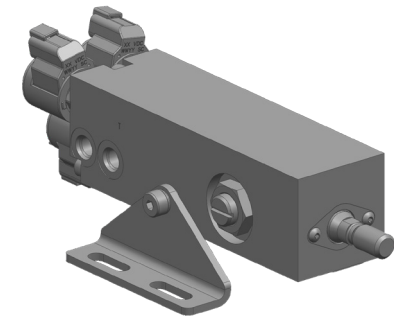

General technical data

Actuator				
Force	Shifting force	N	1000 +/- 300	
	Detent force	N	450 +/- 100	
Stroke	Shifting stroke	mm	±9.5	
	Supply pressure	bar	25±5 (Typically, this is charge pressure of the drive system)	
Pressure	Tank pressure	bar	<2	
	Positions		3 (1-N-2)	


Customer interfaces

Control options					Thread of the shift rod		Ports		Sensors
Electro-hydraulic	12 V	24 V	AMP Connector	Deutsch Connector	Metric thread	M 16	Threaded ports	ISO 6149-1, M14 x 1.5	Proportional position sensor
	✓	✓		✓		✓		✓	✓



LEARN MORE
ACTUATOR

Closed Circuit. Pump/Motor - Compact Unit. K-02.

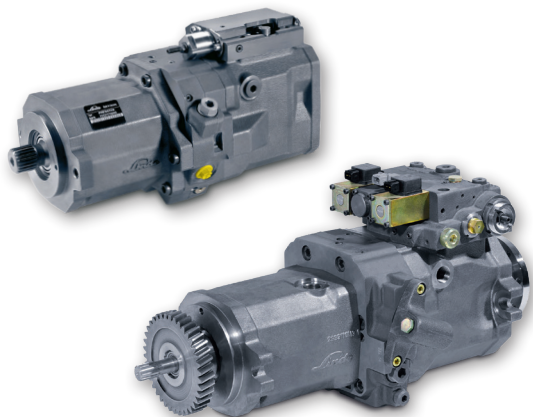

Together with the customer Linde Hydraulics defines new standards in technology. Advanced modular drive technology, realised in hydrostatic variators for variable speed transmission, form the core of power split gearboxes.

Compact units with a hollow shafts are available for mounting to conventional gearboxes in smaller machines. These compact units are used as fully hydrostatic systems with additional mechanical PTO drive. In this way, a further function can be operated independently of the travel function.

With customer-specific developments, Linde Hydraulics supports the change from power shift to continuous variable transmission technology.

Design characteristics

- HPV-02 and HMF-02 back-to-back in common unit
- Version for powersplit transmission and direct drive solutions (e.g. orchard tractors)
- Integrated high pressure relief valves with charge and purge function

Product advantages

- Precise crawling speed
- Compact design
- Low fuel consumption over entire operating range
- Mechanical throughdrive (in addition to travel drive)

General technical data



K-02		
Nominal size		
Displacement	Max. displacement	cc/rev
	Max. operating speed	rpm
Speed	Max. speed*	rpm
	Nominal pressure	bar
Pressure	Max. pressure**	bar
	Max. housing pressure	bar
	Torque ($\Delta p=430$ bar, charge press.=20 bar)	Nm
Corner power (theor.) ($V_{max} \times \Pi_{max} \times \Delta p$ 430 bar)		kW

	55/55	75/75	105/105
Displacement	55/55	75/75	105/105
Max. operating speed	3900	3400	3200
Max. speed*	4150	3600	3400
Nominal pressure	450	450	450
Max. pressure**	500	500	500
Max. housing pressure	2.5	2.5	2.5
Torque ($\Delta p=430$ bar, charge press.=20 bar)	374	519	719
Corner power (theor.) ($V_{max} \times \Pi_{max} \times \Delta p$ 430 bar)	153	185	241

Customer interfaces

	Control option			
	Proportional	3-Position	Pressure cut-off	Enable function
Electro-hydraulic	✓			✓


Sensors	
Swash angle	Speed sensor
✓	✓

Flanges					
	2 hole	2 hole, 4 additional threads M12	2 hole, 4 additional threads M16	2 hole, additional holes (d=17,5mm)	4 hole
SAE-B					
SAE-C	✓				
SAE-D					
SAE-E					

Shafts****		
	ISO 3019-1 (SAE J 744) ANSI B92.1-1970	Compagnion flange SAE J 1946 Typ A
Work ports	✓	✓

Ports			
	ISO 6162-2 Side ports	ISO 6162-2 Twin ports	ISO 6149-1
Work ports			
Threaded ports			✓

* highest transient speed, that can temporarily occur | ** highest transient pressure, that can temporarily occur | **** Availability depends on nominal size

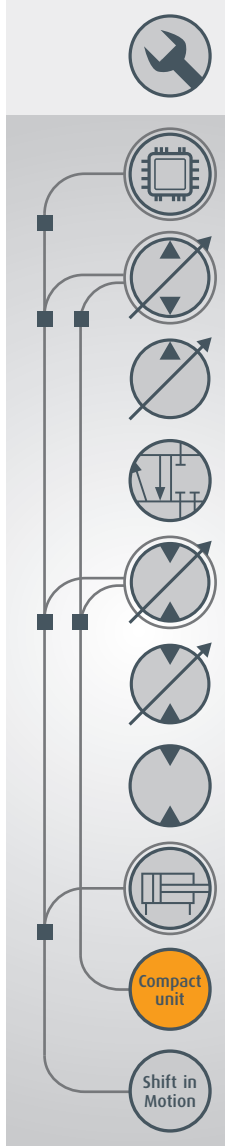

LEARN MORE
K-02

Closed Circuit. Hydrostatic Drive. Shift in Motion.


Design characteristics

- Hydrostatically controlled synchronization of stop to shift gearboxes
- Full utilization of the kinetic energy while changing the gears
- The system includes only two additional components compared to conventional drives


Product advantages

- Autom. and jerkless gear changes (<0.7 sec.) without standstill and the need of expensive synchromesh gear boxes
- Considerable reduction of fuel consumption and noise emission
- Minimum space requirement


Shift in Motion enables shifting procedures in a moving machine, equipped with a manual transmission that is intended to be shifted at standstill by electro-hydraulically synchronising the drivetrain. This system is particularly suitable for vehicles that often change between transport and operation, i.e. vehicles that require both high tractive effort and a high top speed above 25 kilometres per hour. The shifting procedure is load-free thanks to electro-hydraulically synchronised gears and the ability to adjust the drive component's speed and torque. This makes the shifting procedures wear-free and also increases the transmission's efficiency.

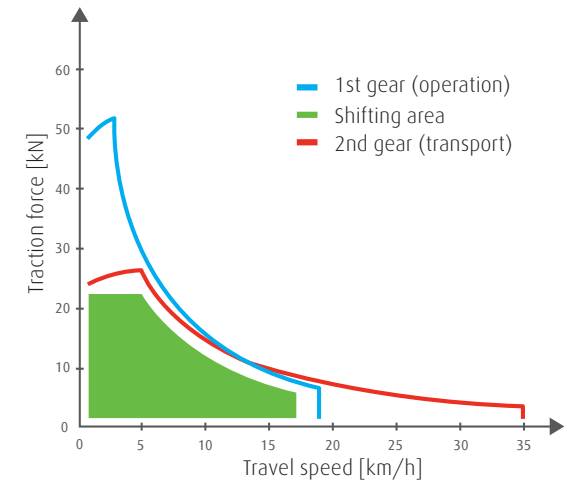

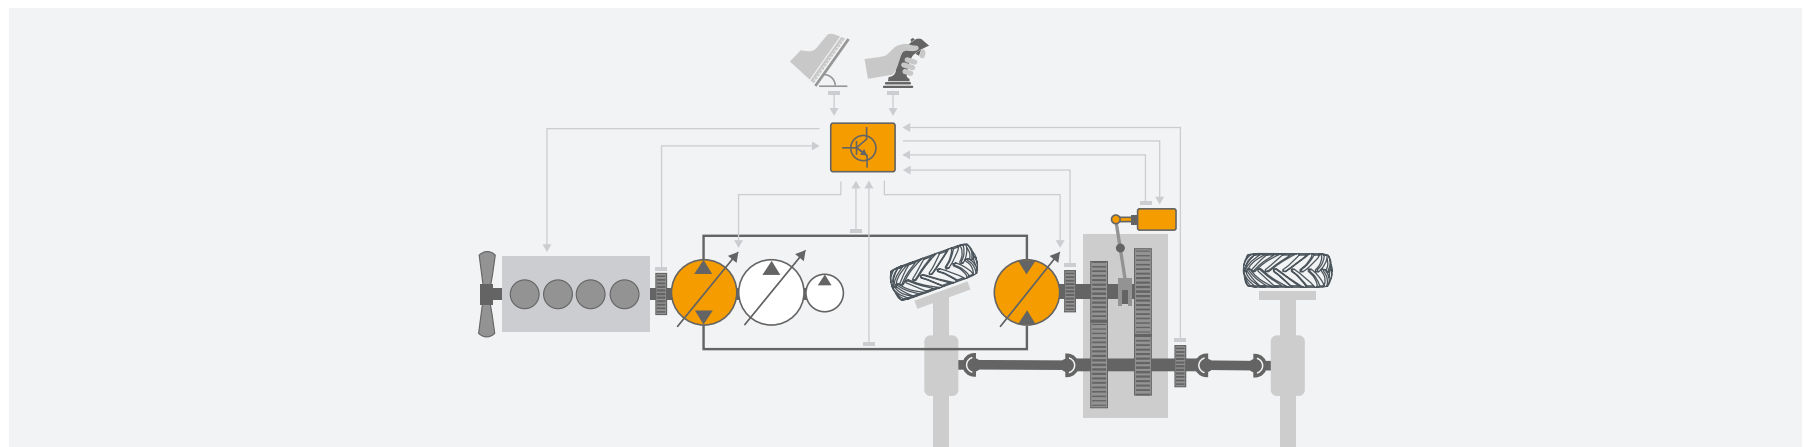

Concept



Implementation


Linde Hydraulics components	
	Electronic control unit iCon
	Variable displacement pump HPV-02
	Variable displacement motor HMV-02
	Shift actuator Actuator

Customer interface	
	Shift rod with clevis or spherical head
	Multiple positions of rest and analog position signal
	Defined default behavior

System requirements	
	Stop to shift gearbox with two or more gears and defined neutral position
	Admissible tractive effort interruption of <0.7 sec



LEARN MORE
SHIFT IN MOTION

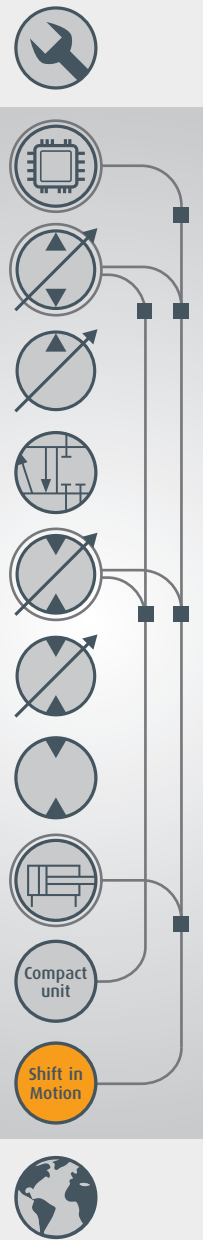


Closed Circuit. Hydrostatic Drive. Shift in Motion.

Application examples



Category

Category



Equipment	
A	1 x HPV 75-02 E2
B	1 x HMV 105-02 E6
C	1 x iCon®
D	1 x Actuator

Equipment	
A	1 x HPV 105-02 E2
B	1 x HMV 135-02 E6
C	1 x iCon®
D	1 x Actuator



LEARN MORE
SHIFT IN MOTION



LEARN MORE
SALES PARTNERS

Linde Hydraulics Worldwide. Sales Partners.


LINDE HYDRAULICS WORLDWIDE



In addition to the Linde Hydraulics locations, our global network of sales partners offers you competent support in the following contexts:

- Development projects
- Application engineering
- Commissioning
- Series production

→ You can find a **sales partner** close to you on our website at www.linde-hydraulics.com/worldwide

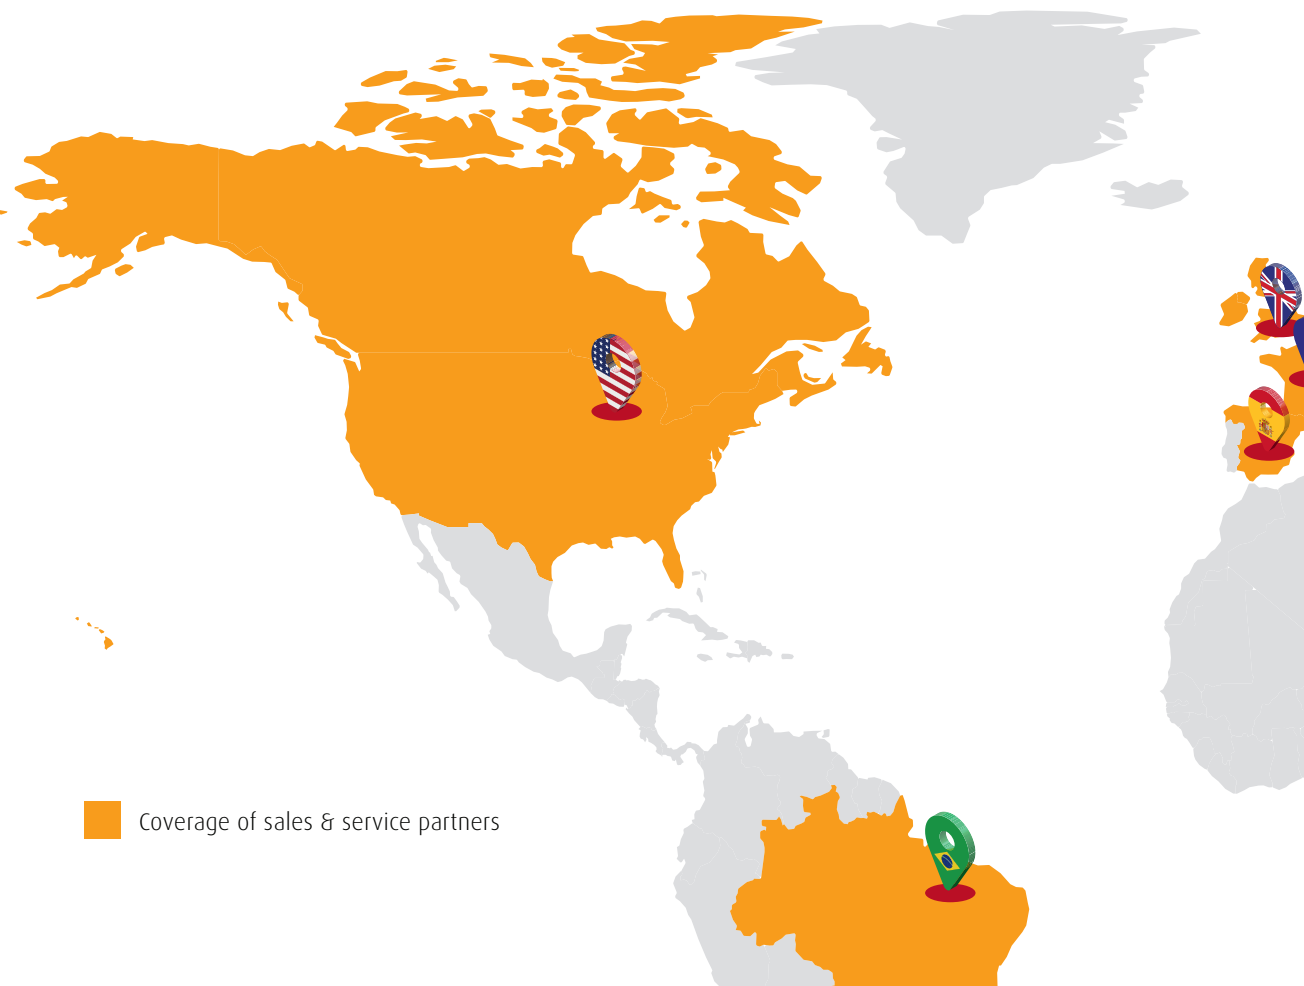

■ Coverage of sales & service partners

Linde Hydraulics Locations



Linde Hydraulics Corporation

5089 Western Reserve Road, Canfield Ohio 44 406
Phone +1 330 533 6801, info@linde-hydraulics.co
1679 Overview Dr, Rock Hill, SC 29730
Phone +1 330 533 6801, info@linde-hydraulics.co



Linde Hydraulics South America

Av. Leôncio de Magalhães, 1004 cj. 33, 02042-001 São Paulo
Phone +55 11 2281 7879, info.br@linde-hydraulics.co



Linde Hydraulics Ibérica, S.L.U.

Camí Can U'bach, 41 A, 08620 Sant Vicenç dels Horts (Barcelona)
Phone +34 93 663 32 58, info@linde-hydraulics.com.es



Linde Hydraulics France SARL


1, rue du Maréchal de Lattre de Tassigny, 78854 Elancourt
Phone +33 130 684 675, info@linde-hydraulics.com



Linde Hydraulics Limited

12-13 Eyston Way, Abingdon Oxfordshire OX14 1TR
Phone +44 1235 522 828, enquiries@lindehydraulics.co.uk

Linde Hydraulics Worldwide. Service Partners.



Our online spare parts shop and worldwide network of service partners offer you strong support in the following contexts:

- Spare parts supply
 - Repair services
 - Remanufacturing
- Just visit our **online shop** at <https://shop.linde-hydraulics.com/> Here you can find all spare parts tailored to your needs easily via the serial number of your unit. A defined stock of parts is available within 24 hours!
- For repair and remanufacturing services you can find a **service partner** close to you on our website at www.linde-hydraulics.com/worldwide

Linde Hydraulics Headquarters



Linde Hydraulics GmbH & Co. KG
Wailandtstrasse 13
63741 Aschaffenburg
Phone +49.60 21.150-00
info@linde-hydraulics.com
www.linde-hydraulics.com



Linde Hydraulics Italia SpA
Viale dell'Unione Europea, 33, 21013 Gallarate (VA)
Phone +39 0331 182 4910, info.it@linde-hydraulics.com



Linde Hydraulics (China) Co., Ltd.
No. 197 Weian Road, High-Tech Development Zone, 261000 Weifang
Phone +86 536 5075293, info@linde-hydraulics.com.cn
No. 89 Jinshang Road, 361009 Xiamen
Phone +86 592 53 87 701, info@linde-hydraulics.com.cn



LEARN MORE
ONLINE SHOP

How to reach us.

Post **Linde Hydraulics GmbH & Co. KG**
Wailandtstrasse 13
63741 Aschaffenburg
Germany

Phone +49.60 21.150-00 switchboard
Fax +49.60 21.150-115 70

E-Mail info@linde-hydraulics.com
Internet www.linde-hydraulics.com




Linde Hydraulics Worldwide.

- (BR)** **Linde Hydraulics South America**
Av. Leôncio de Magalhães, 1004 cj. 33, 02042-001 São Paulo
Phone +55 11 2281 7879, info.br@linde-hydraulics.co
- (ES)** **Linde Hydraulics Ibérica, S.L.U.**
Camí Can U'bach, 41 A, 08620 Sant Vicenç dels Horts (Barcelona)
Phone +34 93 663 32 58, info@linde-hydraulics.com.es
- (FR)** **Linde Hydraulics France SARL**
1, rue du Maréchal de Lattre de Tassigny, 78854 Elancourt
Phone +33 130 684 675, info@linde-hydraulics.com
- (GB)** **Linde Hydraulics Limited**
12-13 Eyston Way, Abingdon Oxfordshire OX14 1TR
Phone +44 1235 522 828, enquiries@lindehydraulics.co.uk
- (IT)** **Linde Hydraulics Italia SpA**
Viale dell'Unione Europea, 33, 21013 Gallarate (VA)
Phone +39 0331 182 4910, info.it@linde-hydraulics.com
- (PRC)** **Linde Hydraulics (China) Co., Ltd.**
No. 197 Weian Road, High-Tech Development Zone, 261000 Weifang
Phone +86 536 5075293, info@linde-hydraulics.com.cn
No. 89 Jinshang Road, 361009 Xiamen
Phone +86 592 53 87 701, info@linde-hydraulics.com.cn
- (USA)** **Linde Hydraulics Corporation**
5089 Western Reserve Road, Canfield Ohio 44 406
Phone +1 330 533 6801, info@linde-hydraulics.co
1679 Overview Dr, Rock Hill, SC 29730
Phone +1 330 533 6801, info@linde-hydraulics.co



Visit
www.linde-hydraulics.com/worldwide
to find a sales or service partner
close to you.

Linde Hydraulics GmbH & Co. KG
Wailandtstrasse 13, 63741 Aschaffenburg, Germany
Phone +49.60 21.150-00, Fax +49.60 21.150-115 70
info@linde-hydraulics.com, www.linde-hydraulics.com



Turning Power into Motion.

