
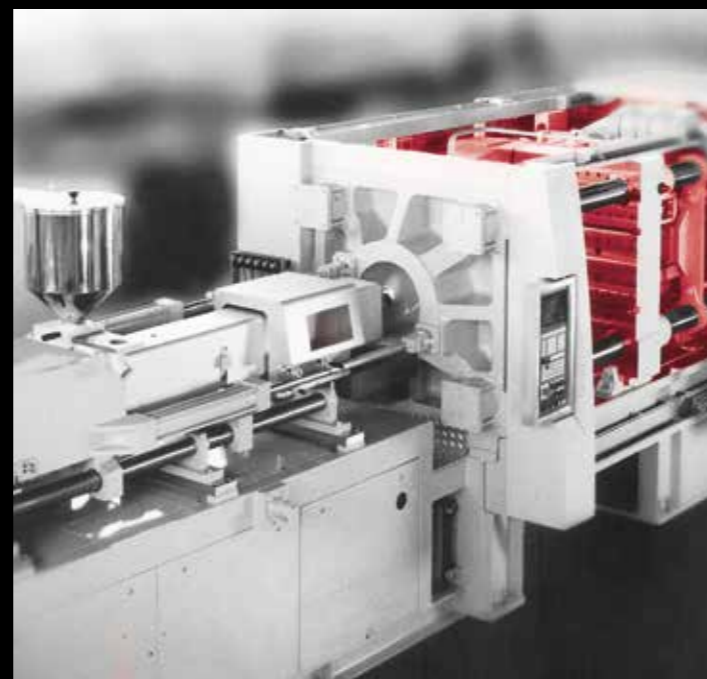


**Temposonics® Position Sensors
for Industrial Applications**

PRODUCT SELECTOR GUIDE

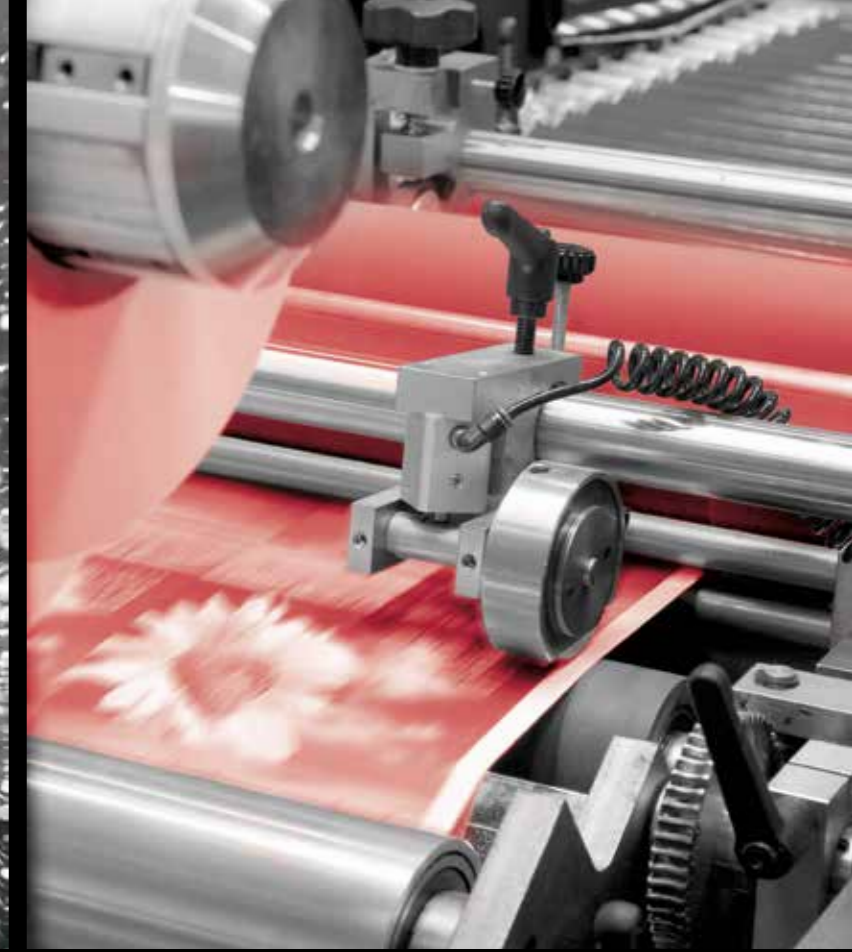

MEETING THE CHALLENGES OF INDUSTRIAL APPLICATIONS

Metal Working • Wood Processing • Testing Machines • Drive Technology • Machine Tools
Packaging & Printing Machineries • Paper & Glass Processing • Food & Beverage Plants
Plastics & Rubber Processing • Textile Production • Renewable Energy • Power Generation

MTS Sensors also offers solutions for Mobile Hydraulics (off-highway vehicles) and Liquid Level applications

TABLE OF CONTENTS

COMPANY & MEASURING TECHNOLOGY

5

SENSORS SOLUTIONS AT A GLANCE

6

QUICK GUIDE & CERTIFICATES

16

E-SERIES - Compact solutions for limited spaces

20

G-SERIES - High durability in harsh environments

22

GB-SERIES - Innovative design for demanding applications

24

R-SERIES V - The new generation + TempoLink smart assistant

26 + 27

R-SERIES - Superior performance solutions for challenging applications

28

T-SERIES - Rugged design for hazardous environments

30

HAZARDOUS AREAS

32

LOCAL SUPPORT

34

COMPANY

MTS Sensors is recognized as an industry leader in sensing technologies and solutions. These sensors permit high-precision and dynamic position and/or speed measurement in state-of-the-art automation and safety-relevant applications.

With a versatile and ever increasing product portfolio, MTS Sensors cooperates closely with customers, to optimize performance and reduce downtimes. Outstanding quality associated with practical know-how ensures that customers achieve utmost productivity and success. Continuous research, development and production of sensor systems constantly enable new solutions for measuring tasks in the industrial, mobile hydraulics as well as process technology fields to be created.


MTS Sensors is a division of MTS Systems Corporation (NASDAQ:MTSC). In July 2016, MTS Systems Corporation (Eden Prairie, USA) purchased PCB Piezotronics Inc. (Depew, USA). The acquisition will continue MTS' and PCB's long history of growth. Our customers benefit from an extended, complementary product portfolio, while relying on the unwavering competence and diligence of our support team. MTS Sensors has 1450 employees worldwide who serve our global customers with a focus on superior regional support.

MEASURING TECHNOLOGY

The absolute, linear position sensors provided by MTS Sensors rely on the company's proprietary Tempsonics® magnetostrictive technology, which can determine position with a high level of precision and robustness.

Each Tempsonics® position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the end of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

The Tempsonics® technology, based on magnetostriction, does not rely on moving parts and is not exposed to mechanical stress. Therefore, the sensors exhibit considerably longer lifespans and much higher reliability when compared to other technologies, even in harsh working conditions. Furthermore, since the output from sensors with Tempsonics® technology corresponds to an absolute position, rather than a relative value, it is not required to recalibrate sensors.

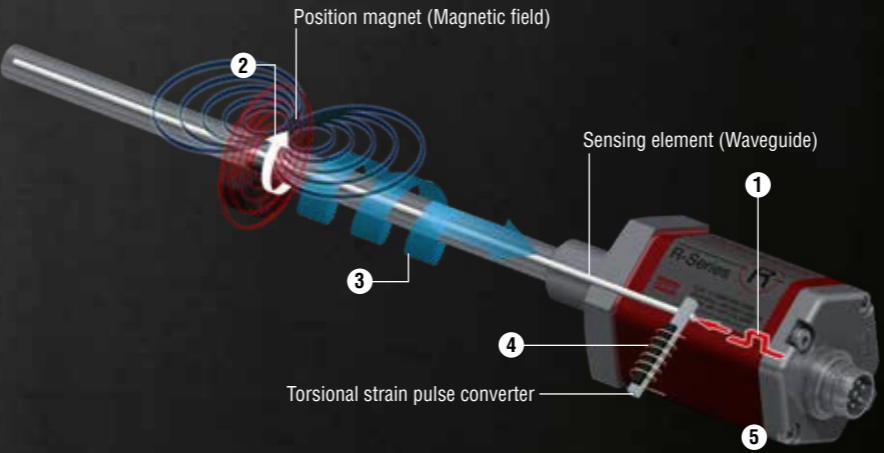

Measurement Cycle	
1	Current pulse generates magnetic field
2	Interaction with position magnet field generates torsional strain pulse
3	Torsional strain pulse propagates
4	Strain pulse detected by converter
5	Time-of-flight converted into position

I AM THE NEW GENERATION

I am ready for Industry 4.0

R-Series V sensors are smarter than ever

I am reliable in your application


R-Series V sensors are more robust than ever

I am compatible with your application

R-Series V sensors are all backward compatible

I am more powerful in your application

R-Series V sensors are more reliable than ever

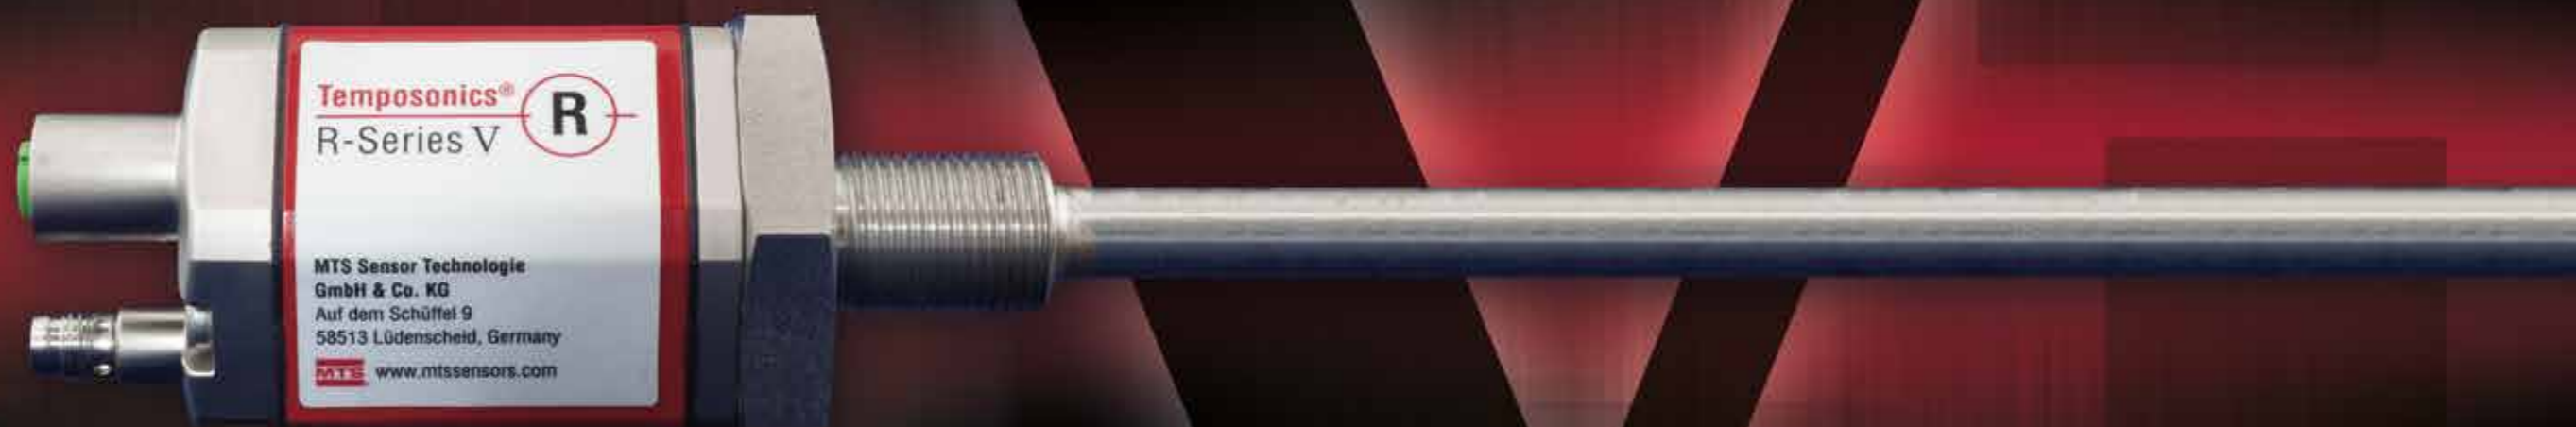

**Trust in what you know.
Now even better.**

“Temposonics® R-Series V is the follow up to our current fourth generation. Based on our long-standing experiences, R-Series V is the next step in the innovative evolution of our sensors. By maintaining the qualities we are well-known for and at the same time pushing the boundaries, we are able to provide our customers the best R-Series we ever made.”

André Beste, Technical Marketing Manager

SUPERIOR PERFORMANCE

Have a challenging application?
Need reliable performance combined with
resistance to high temperature, dirt and vibration?

Extreme demands require extraordinary solutions. MTS Sensors responds to this with an extensive range of measuring stroke options, simultaneous measurement of multiple magnets, smart electronic designs with built-in diagnostics, innovative housing concepts and a wide variety of controller interfaces. Our Tempsonics® magnetostrictive technology is maximized with powerful electronics and double-shielded construction that assures immunity against interference. The robust designs guarantee maximum reliability, high-precision position measurements and long-term operation in the harshest environments.

Success where others fail.



20 METERS
POSITIONS AND MORE



COMPACT SOLUTIONS

Need a reliable sensing solution designed for limited space or difficult access?

In line with your application requirements, MTS Sensors delivers solutions which fit your exact needs in terms of design and performance – from ultra-low profiles and detached electronics to compact hazardous area approved housings. In food & beverage, plastics, textiles and other industries, Temposonics® technology guarantees maximum productivity.

Always the smartest solution.



MAXIMUM SAFETY

Have an explosive environment or a dangerous area?

Temposonics® sensors from MTS Sensors are the first choice when it comes to meeting safety and hazardous area standards – including SIL 2, ATEX- (Europe), NEC- (USA), CEC- (Canada), EAC Ex- (russian market), IECEx- (global market) and the Japanese approval for use in Class I, II, III, Division 1, Division 2 and Zone 0/1, Zone 1, Zone 2, Zone 21 and Zone 22. Optimized for applications where there is potential for exposure to flames and caustic substances, as well as the possibility of explosive atmospheres, our sensors are highly suited to implementation in chemical plants, offshore oil / gas rigs and other applications of this kind.

Maximum safety for machines and their operators.



INNOVATIVE TECHNOLOGY

Our mission at MTS Sensors is to provide outstanding quality and application knowledge. We focus on understanding your requirements so you can attain the highest levels of productivity and that success is assured. Our resources are dedicated to the continual development of new products and delivering unparalleled application-oriented solutions to market with speed and agility. It is no coincidence that the engineering team at MTS Sensors is the largest professional team within our organization.

Pioneers and Innovators.

IN-CYLINDER APPLICATIONS

The rod-style sensor models from MTS Sensors are designed for direct stroke measurement inside prepared hydraulic or pneumatic cylinders. High performance, durability and value have made our Temposonics® sensors the standard for in-cylinder applications in the fluid power industry. In addition, these sensors feature high degrees of linearity, immunity to electromagnetic interference (EMI) and resistance to shock and vibration. We offer an extensive variety of features, dimensions and interfaces to match your exact specifications.



MODULAR DESIGN

At the head of our sensors, a threaded flange and O-ring allow the device to be mounted and sealed into a port opening in the cylinder end cap. Alternatively, some sensor designs enable direct embedding of the complete sensor (including the supporting electronics) inside the cylinder. Here the sensor's pressure-resistant rod fits into a bore that is drilled through the center of the piston head and rod assembly. The position magnet is mounted on the top of the piston head or installed in a shallow counter-bore within the piston head.

Modular, environmentally friendly design

The modular design of the R-, G- and GB-Series devices allows for easy replacement of the sensing element and electronics without breaking the cylinder's high pressure seal. This not only prevents leaks from the cylinder port, but also significantly reduces maintenance costs and downtime. Temposonics® technology is mounted inside cylinders across a broad range of industry sectors – from steel rollers to wood plants, from food processing to renewable energy.

SERIES QUICK GUIDE

	E Series	G Series	GB Series	R Series V	R Series	T Series
	Compact Solutions	High Durability	Innovative Design	The New Generation	Superior Performance	Rugged Design

FEATURES						
Velocity measurement				•	•	
Multi-position measurement	•	•		•	•	•
Programmable sensor parameters		•	•	•	•	•
Diagnostic LEDs		•		•	•	
Redundant version		•			•	

OUTPUT						
Analog – Current	•	•	•		•	•
Analog – Voltage	•	•	•		•	
Start/Stop	•	•				
PWM		•				
SSI	•		•		•	•
Profibus					•	
CANbus	•				•	•
DeviceNet					•	
EtherCAT®					•	
EtherNet/IP™				•	•	
Powerlink					•	
Profinet				•	•	
IO-Link	•					

MINIMUM STROKE LENGTH						
25 mm (1 in.)			•	•	•	•
50 mm (2 in.)	•	•				

MAXIMUM STROKE LENGTH						
1500 mm (60 in.)	ER					TH (SIL 2)
2540 mm (100 in.)	EH, EE	GTE			RT4	
2900 mm (114 in.)		GT				
3000 mm (118 in.)	EP, EL, EP2, ET					
3250 mm (128 in.)			GB			
5080 mm (200 in.)		GP			RP, RD4	
6350 mm (250 in.)				RP		
7620 mm (300 in.)		GH		RH	RH, RS	TH
20000 mm (787 in.)					RF	

CERTIFICATES

										
CE	UL/cUL	SIL 2	ATEX	NEC/CEC	NEC/CEC	IECEX	EAC	EAC Ex	Japanese Approval	DNV GL

E-SERIES											
EH	•	•						•			
ET	•			•	•		•	•			
EP	•	•						•			
EL	•	•						•			
EP2	•	•						•			
ER	•	•						•			
EE	•							•			

G-SERIES											
GH	•	•		•				•			
GP	•	•		•				•			
GT2 / GT3	•							•			•
GTE	•			•			•	•			

GB-SERIES											
GB	•							•			

R-SERIES V											
RH5	•							•			
RP5	•							•			

R-SERIES											
RH	•	•		•				•			
RP	•	•		•				•			
RF	•							•			
RD4								•			
RT4								•			
RS	•							•			

T-SERIES											
TH	•			•	•		•	•	•	•	
TH (SIL 2)	•		•	•	•		•	•	•	•	

HPH FOR G- / R-SERIES											
GH	•			•		•	•				
RH	•			•		•	•				

100% FOR YOU QUALITY FROM HEAD TO TOE



E-SERIES

(EH, ET, EP, EL, EP2, ER, EE)


The Temposonics® E-Series are very compact sensor models suitable for situations where space-constrained mounting is a critical factor. MTS Sensors offers different designs to meet the needs of various industrial applications.

This series comprise three rod models for in-cylinder integration: EH, ET, EE (embedded in cylinder). In addition there are three profile models which feature a slim housing: EP, EL and EP2. On the EP2 sensor, the position magnet can travel along the entire flat housing profile. Finally there is the ER sensor. This has an aluminum cylinder with a guided driving rod which contains both the sensor element and the electronics. The position is detected via the solid extractable driving rod.

Typical applications for E-Series sensors are plastics processing, food & beverage processing, control systems and packaging.

Output (resolution)						
	EH	ET	EP / EL	EP2	ER	EE
Current	Infinite	16 bit*	Infinite	Infinite	Infinite	Infinite
Voltage	Infinite	16 bit*	Infinite	Infinite	Infinite	–
Start/Stop	**	**	**	**	**	–
SSI	20 µm	5 µm	20 µm	20 µm	20 µm	–
CANopen	10 µm	–	10 µm	10 µm	10 µm	–
IO-Link	5 µm	–	5 µm	5 µm	5 µm	–
Operating conditions						
Temperature	EH / EP / EL / EP2 / ER: –40...+75 °C (–40...+167 °F) ET (Analog): –40...+85 °C (–40...+185 °F) ET (SSI): –40...+90 °C (–40...+194 °F) ET (Start/Stop): –40...+105 °C (–40...+221 °F) EE: –40...+85 °C (–40...+185 °F)					
Shock test	100 g (single shock), IEC standard 60068-2-27					
Vibration test	EH / EP / EL / EE: 15 g / 10...2000 Hz ET: 20 g / 10...2000 Hz EP2: 8 g / 10...2000 Hz ER: 5 g / 10...2000 Hz IEC standard 60068-2-6 (resonance frequencies excluded)					
Design						
Stroke length	EH / EE: 50...2540 mm (2...100 in.) ET / EP / EL / EP2 : 50...3000 mm (2...118 in.) ER: 50...1500 mm (2...60 in.)					
Accuracy						
Linearity	≤ ±0.02 % F.S.					
Electrical connection						
Operating voltage	+24 VDC (–15 / +20 %)					

* Minimum 1 µm depending on stroke length
** Controller dependent

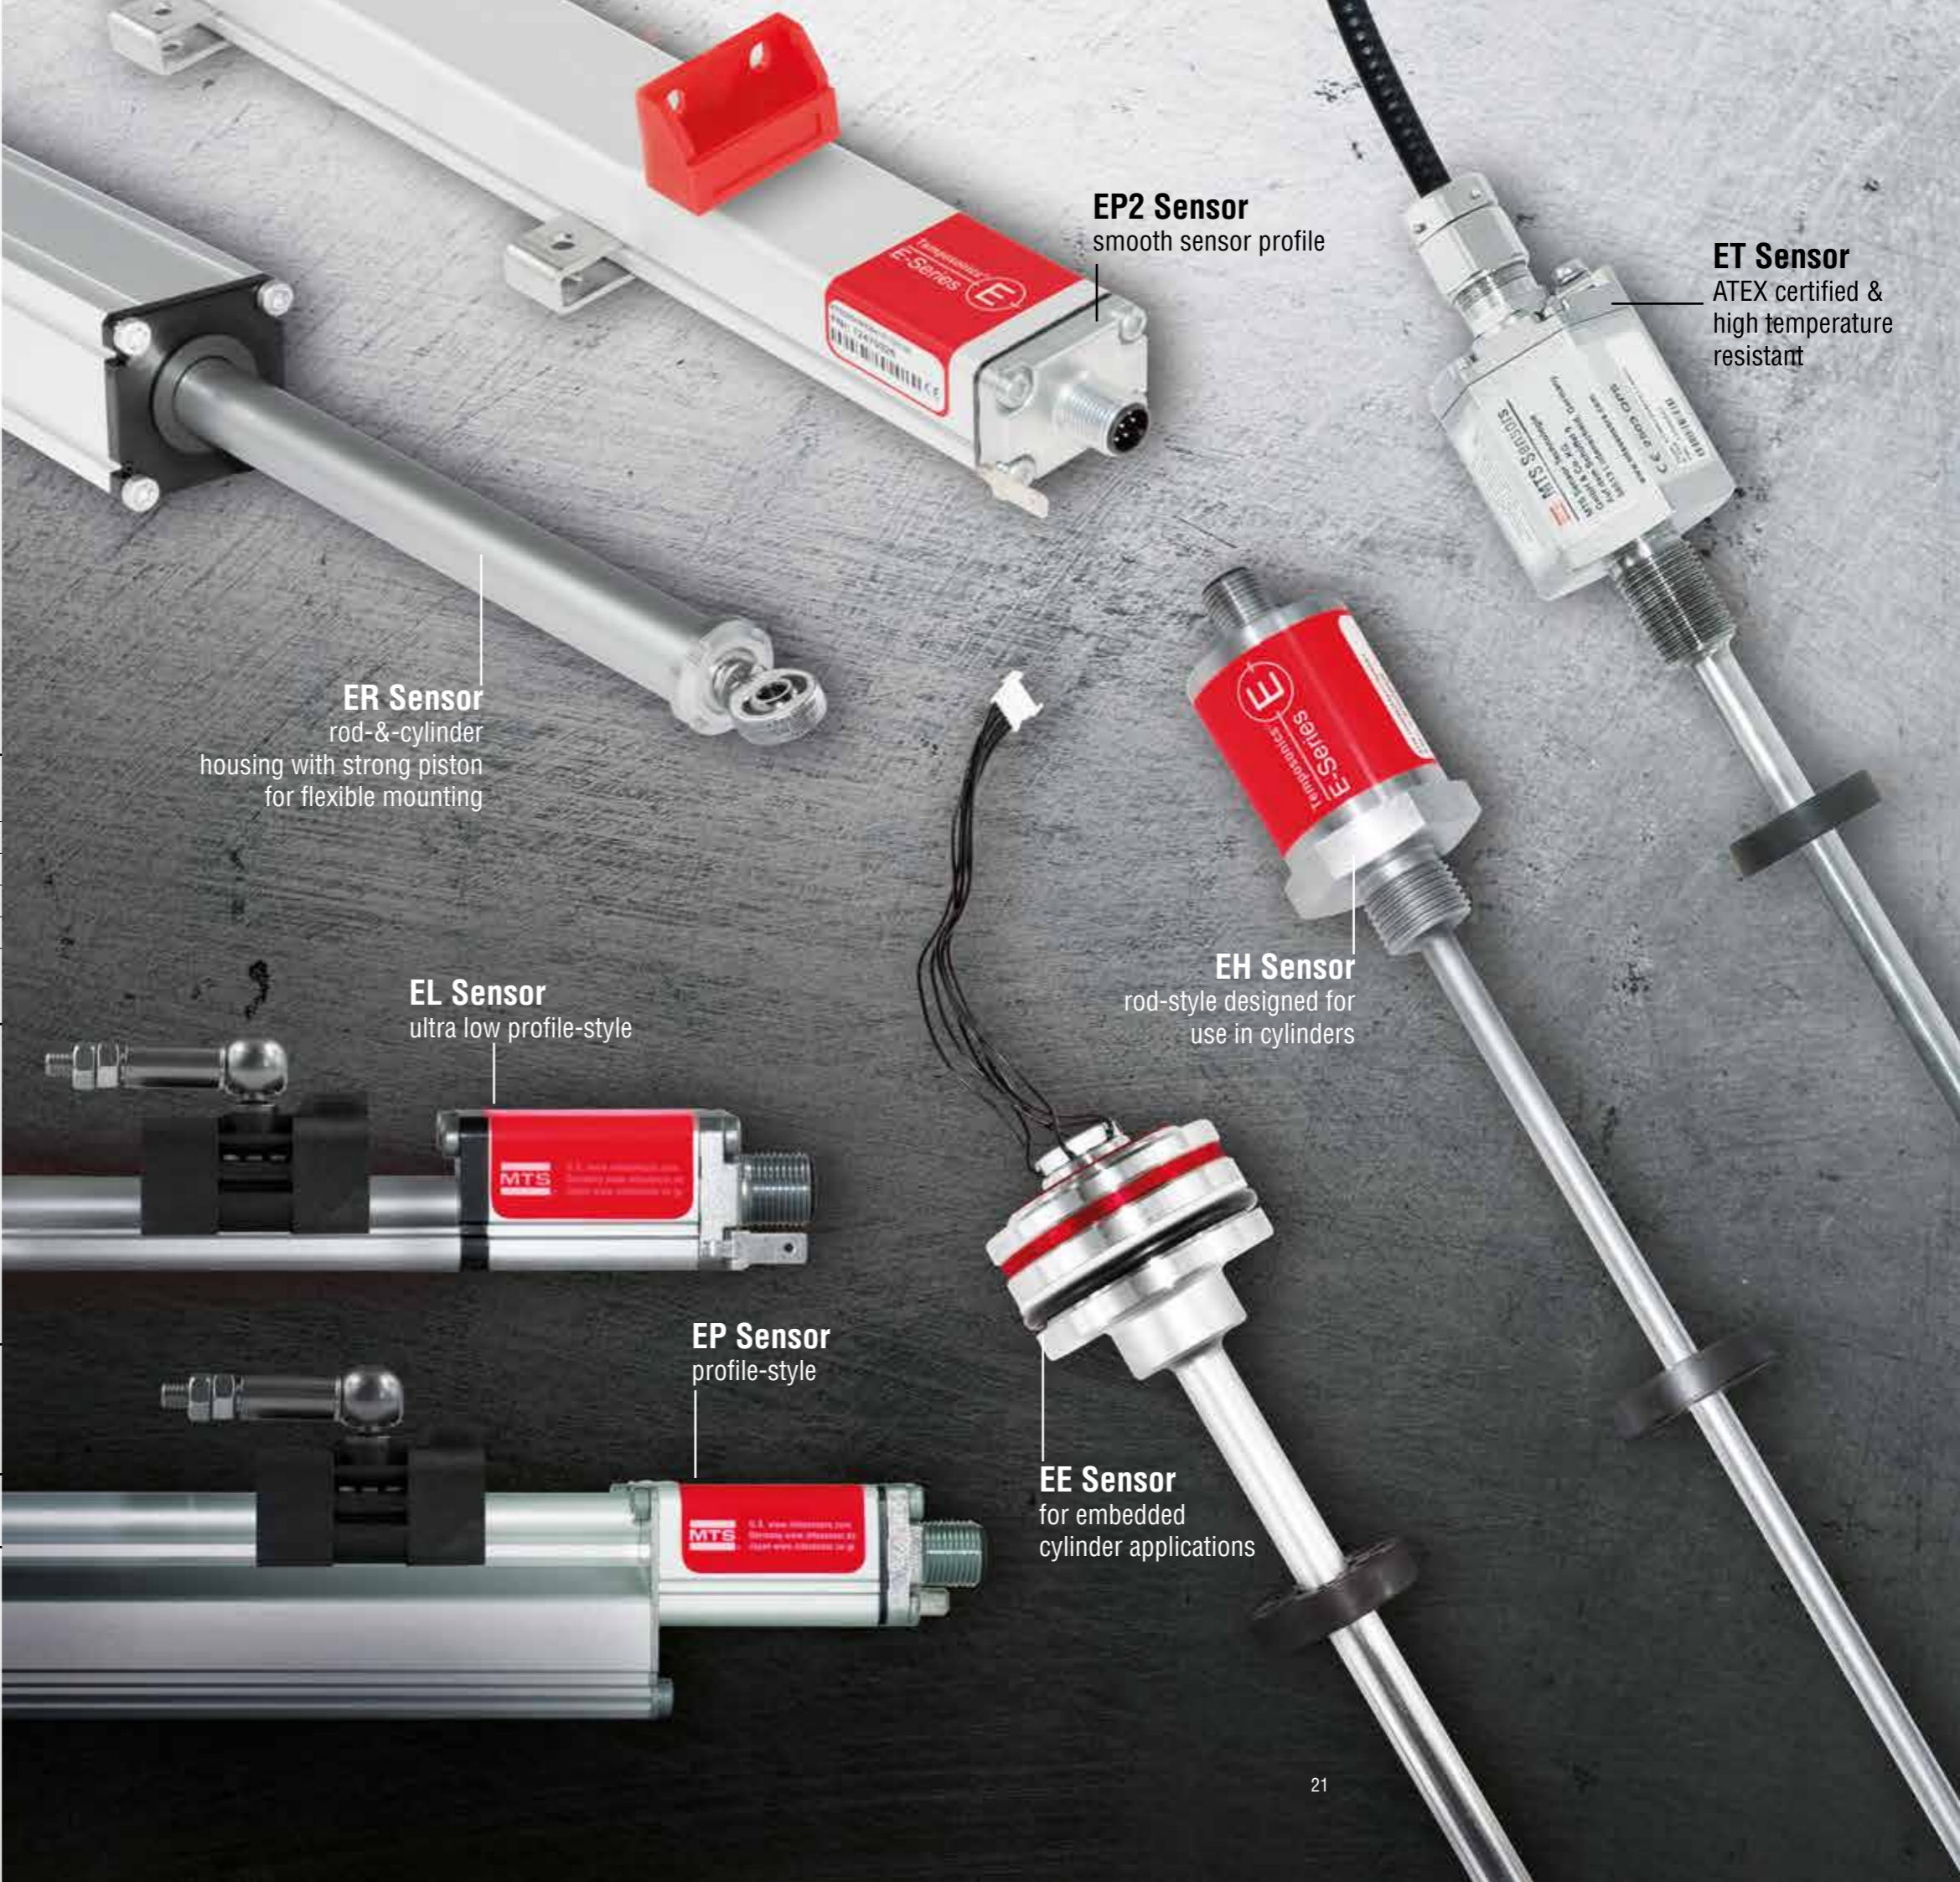

EP2 Sensor
smooth sensor profile

ET Sensor
ATEX certified &
high temperature
resistant

ER Sensor
rod-&-cylinder
housing with strong piston
for flexible mounting

EL Sensor
ultra low profile-style

EH Sensor
rod-style designed for
use in cylinders

EP Sensor
profile-style

EE Sensor
for embedded
cylinder applications

G-SERIES

(GH, GP, GT2 / GT3, GTE)

The Temposonics® G-Series provides high durability and accurate position measurement solutions in harsh industrial settings. The sensor element is installed in a pressure-resistant stainless steel rod or aluminum profile. A double-shielded housing protects the electronics and offers excellent EMI immunity.

The GT2 / GT3 and GTE models feature multiple independent measuring systems contained in one compact housing. Each measuring system has its own channel with sensor element, power and evaluation electronics and output signal. The GTE model is embedded in cylinder for added robustness. Example applications include control valves, fluid cylinders, turbine pitch control, ship control systems and floodgates.

Output (resolution)				
	GH	GP	GT2 / GT3	GTE
Current	Infinite	Infinite	Analog	Infinite
Voltage	Infinite	Infinite	Analog	Infinite
Start/Stop	*	*	—	—
PWM	*	*	—	—
Operating conditions				
Temperature	GH / GP: -40...+80 °C (-40...+176 °F) GT2 / GT3: -40...+75 °C (-40...+167 °F) GTE: -20...+75 °C (-4...+167 °F)			
Shock test	100 g (single shock), IEC standard 60068-2-27			
Vibration test	GH**: GP: GT2 / GT3: GTE: IEC standard 60068-2-6 (resonance frequencies excluded)			
Design				
Stroke length	GH:	50...7620 mm (2...300 in.)		
	GP:	50...5080 mm (2...200 in.)		
	GT2 / GT3:	50...2900 mm (2...114 in.)		
	GTE:	50...2540 mm (2...100 in.)		
Accuracy				
Linearity	< ±0.02 % F.S.			
Electrical connection				
Operating voltage	+24 VDC (-15 / +20 %)			

* Controller dependent
 ** Option: High vibration resistant



GB-SERIES

(with threaded flange or pressure fit flange)

The Temposonics® GB-Series is designed to be incorporated into hydraulic cylinders, such as those typically used in power generation plants. The flat, compact electronics housing facilitates deployment in restricted spaces.

The operational advantages of these sensors are: High pressure resistance (the new GB-J sensor offers up to 800 bar operating pressure), strong immunity to EMI and ability to operate in temperatures up to +100 °C (+212 °F). High durability and increased resistance to rust is achieved by using 316L stainless steel (only GB-N version). GB-Series sensors can be programmed using a hand-programmer unit, through the USB port or wirelessly via Bluetooth®. Thanks to the Bluetooth® properties it is possible to set and monitor parameters remotely – making the operator's life significantly easier!

The GB with threaded flange (GB-M / GB-T) offers further advantages such as a sensor electronics housing with its electrical connection that can be rotated 360 degrees to easily achieve the necessary connection orientation. If needed, the sensor element and electronics can be replaced while the flange is still installed in the cylinder. This means that the hydraulic circuit is not interrupted and thus results in lower maintenance costs and reduced downtime.

Output (resolution)	
Current	16 bit
Voltage	16 bit
SSI	5 µm
Operating conditions	
Temperature	–40...+100 °C (–40...+212 °F)
Shock test	100 g (single shock), IEC standard 60068-2-27
Vibration test	15 g / 10...2000 Hz IEC standard 60068-2-6 (resonance frequencies excluded)
Design	
Stroke length	25...3250 mm (1...128 in.)
Accuracy	
Linearity	< ±0.02 % F.S.
Electrical connection	
Operating voltage	+24 VDC (–15 / +20 %)

More information available at:
www.mtssensors.com



GB-M / GB-T Sensor
Sensor element & electronics
can be easily replaced,
configurable via Bluetooth®

**GB-J / GB-K /
GB-S / GB-N Sensor**
high pressure rod-style
for high operating temperature,
configurable via Bluetooth®

R-SERIES V

The new generation

(RH5, RP5)

R-Series V is the successor to our current fourth generation. The new sensors have higher resistance to vibration and high temperatures, are ready for Industry 4.0 and fit perfectly into existing applications.

The new sensors are even more powerful in use. They offer a sampling rate of up to 4 kHz with extrapolation. They also feature Profinet with IRT (Isochronous Real Time) and EtherNet/IP™ with CIP Sync (Common Industrial Protocol) and a typical jitter of ±2 µm.

The new Industry 4.0 features offer users great advantages, as they provide additional information about the process in addition to the pure process data (position/speed). Status and statistical data is recorded and processed during operation, and can be used to better understand the processes within the application.

In combination with the increased performance and improved robustness, the user is offered the certainty that existing applications work even more reliably and that future requirements are already being met.

Output (resolution)		
	RH5	RP5
EtherNet/IP™	0.5 µm	0.5 µm
Profinet	0.5 µm	0.5 µm
Operating conditions		
Temperature	-40...+85 °C (-40...+185 °F)	
Shock test	150 g (single shock), IEC standard 60068-2-27	
Vibration test	30 g / 10...2000 Hz IEC standard 60068-2-6 (resonance frequencies excluded)	
Design		
Stroke length	RH5:	25... 7620 mm (1...300 in.)
	RP5:	25... 6350 mm (1...250 in.)
Accuracy		
Linearity deviation	< 0.01 % F.S. (minimum ≤ ±50 µm)	
Electrical connection		
Operating voltage	12...30 VDC ±20 % (9.6...36 VDC)	



TempoLink Smart Assistant for

R-Series V

The TempoLink smart assistant supports the integration of the sensor into the application and the transfer of additional information to the user. With the assistant, the user can call up data such as the current sensor status, the internal sensor temperature, the number of operating hours and the distance travelled by the position magnets. An evaluation of these values can help in the creation of predictive maintenance plans and thus lead to an optimization of production.

The connection and communication between the Tempsonics® R-Series V sensor and the TempoLink smart assistant is via the power supply. The assistant can transfer the various sensor parameters wirelessly or via the USB port while the sensor continues to operate.

Because the TempoLink smart assistant provides its own WiFi access point, WiFi-enabled devices such as smartphones, tablets or laptops can access it very easily. No software installation or app is required, nor is access to a company network.



R-SERIES

(RH, RP, RF, RD4, RT4, RS)

The Temposonics® R-Series features the highest performance, accuracy and reliability in magnetostrictive linear position sensors designed for advanced motion control implementations. With a variety of housing styles and electrical interfaces, the R-Series can be integrated into a wide range of applications. They have a modular construction and are extremely robust. The double-shielded design assures the best immunity against EMI. Whether it is a rod version (RH), profile version (RP), has detached electronics (RD4), built-in redundancy (RT4) or a flexible rod (RF), the R-Series is a highly compelling sensor solution. For extremely harsh environments MTS Sensors offers the RS sensor with IP69K protective housing.

Output (resolution)	RH	RP	RF	RD4	RT4	RS
Current	16 bit	16 bit	16 bit	16 bit	–	16 bit
Voltage	16 bit	16 bit	16 bit	16 bit	–	16 bit
SSI	0.5 µm	0.5 µm	2 µm	1 µm	1 µm	0.5 µm
Profibus	1 µm	1 µm	1 µm	1 µm	–	1 µm
CANbus	2 µm	2 µm	2 µm	2 µm	–	2 µm
DeviceNet	2 µm	2 µm	2 µm	2 µm	–	–
EtherCAT®	1 µm	1 µm	1 µm	1 µm	–	1 µm
EtherNet/IP™	1 µm	1 µm	1 µm	1 µm	–	–
Powerlink	1 µm	1 µm	1 µm	1 µm	–	–
Profinet	1 µm	1 µm	1 µm	1 µm	–	–
Operating conditions						
Temperature	–40...+75 °C (–40...+167 °F)					
Shock test	100 g (single shock), IEC standard 60068-2-27					
Vibration test	RH / RP*: 15 g / 10...2000 Hz					
	RF: 5 g / 10... 150 Hz					
	RD4: 10 g / 10...2000 Hz					
	RT4: 5 g / 10...2000 Hz					
	IEC standard 60068-2-6 (resonance frequencies excluded)					
Design						
Stroke length	RH: 25... 7620 mm (1...300 in.)					
	RP / RD4: 25... 5080 mm (1...200 in.)					
	RF: 150...20000 mm (6...787 in.)					
	RT4: 25... 2540 mm (1...100 in.)					
	RS: 50... 7620 mm (1...300 in.)					
Accuracy						
Linearity	RH / RP / RS: < ±0.01 % F.S.					
	RF / RD4 / RT4: < ±0.02 % F.S.					
Electrical connection						
Operating voltage	+24 VDC (–15 / +20 %)					

*Option: High vibration resistant

More information available at:
www.mtssensors.com



RT4 Sensor
redundant sensor with
detached electronics

RH Sensor
rod-style designed
for use in cylinders

RF Sensor
flexible sensor rod for
stroke lengths up to 20 m

Diagnostics LEDs

RP Sensor
profile-style

RS Sensor
with IP69K
protective housing

RD4 Sensor
with detached sensor
electronics

T-SERIES

(TH)

Series are designed for hazardous working environments, where they may have to deal with flames, caustic substances and potentially explosive atmospheres (such as chemical plants, offshore oil / gas rigs, etc.).

They are the first linear position sensors in the industry to meet SIL 2 standards. In addition to this, all T-Series sensors carry the ATEX certification for Europe, the NEC and CEC certificates for the US and Canada, the EAC Ex certificate for the Russian market, the IECEx certificate for the global market as well as the Ex-certificate for Japan for use in Class I, II, III, Division 1, Division 2 and Zone 0/1, Zone 1, Zone 2, Zone 21 and Zone 22.

Output (resolution)	
Current	Minimum 16 bit
SSI	Minimum 0.5 µm
CANbus	Minimum 2 µm
Operating conditions	
Temperature	Standard: -40...+75 °C (-40...+167 °F) SIL 2: -40...+85 °C (-40...+185 °F)
Shock test	100 g (single shock), IEC standard 60068-2-27
Vibration test	15 g / 10...2000 Hz IEC standard 60068-2-6 (resonance frequencies excluded)
Design	
Stroke length	Standard: 25...7620 mm (1...300 in.) SIL 2: 25...1500 mm (1...60 in.)
Accuracy	
Linearity	< ±0.01 % F.S.
Electrical connection	
Operating voltage	+24 VDC (-15 / +20 %)

More information available at:
www.mtssensors.com



TH Sensor
ATEX- / CEC- / NEC- /
EAC Ex / IECEx- certified /
Japanese approval & SIL 2 capable
rod-style for maximum safety

HAZARDOUS AREAS

MTS Sensors responds to the user's need of maximum safety with sensor models specifically designed for applications found in hazardous (increased safety & flameproof) and functional safety (SIL) regulated environments.



G-Series GH / GP	
Stroke length	50...1650 mm (2...65 in.)
Marking	Ⓜ II 3G Ex nA IIC T4 Gc Ⓜ II 3D Ex tc IIIB T100°C Dc IP65/67
Operating temperature	-20 °C (-4 °F) ≤ Ta ≤ 75 °C (+167 °F)
IP ingress protection	GH: IP67 / GP: IP65
Outputs	Analog & Start/Stop



G-Series GTE	
Marking	Ⓜ II 3G Ex nA IIC T4 Gc
Operating temperature	-20...+75 °C (-4...+167 °F)
IP ingress protection	IP54
Output	Analog



HPH (G- / R-Series)	
Marking	Ⓜ II 1/2 G Ex d IIC T5 Gb Ⓜ II 1/2 D Ex tb IIIC T100°C Db Ⓜ Class 1, Div 1, Groups A, B, C, D
Operating temperature	-40...+75 °C (-40...+167 °F)
IP ingress protection	IP68
Outputs G-Series	Analog, Start/Stop & PWM
Outputs R-Series	Analog, Profibus, CANbus, SSI & DeviceNet



SAFE



T-Series TH	
Marking	Enclosure type D/G: Ⓜ II 1/2G Ex db IIC T4 Ga/Gb Ⓜ II 1G/2D Ex tb IIIC T130°C Ga/Db ERL G Ga/Gb Ex db IIC T4 X Da/Db Ex tb IIIC T130°C X Certificate No. CML 17JPN1072X: Ex d IIC T4 Ga/Gb Ex t IIIC T130°C Db Enclosure type G: Ⓜ Class I Div. 1 Groups A, B, C, D T4 Class II/III Div. 1, Groups E, F, G T130°C Class I Zone 0/1 AEx d / Ex d IIC T4 Class II/III Zone 21 AEx tb / Ex tb IIIC T130°C Group A is not approved for Canada Enclosure type E: Ⓜ II 1/2G Ex db eb IIC T4 Ga/Gb Enclosure type E with SIL 2 Ⓜ II 1G/2D Ex tb IIIC T130°C Ga/Db Ⓜ Class I Div. 2 Groups A, B, C, D T4 Class II/III Div. 2 Groups E, F, G T130°C AEx nA / Ex nA IIC T4 AEx tb/ Ex tb IIIC T130°C ERL G Ga/Gb Ex db eb IIC T4 X Da/Db Ex tb IIIC T130°C X Certificate No. CML 17JPN1072X: Ex d e IIC T4 Ga/Gb Ex t IIIC T130°C Db
Operating temperature	Standard version: -40 °C (-40 °F) ≤ Ta ≤ 75 °C (+167°F) Enclosure type D / G SIL 2 version: -40 °C (-40 °F) ≤ Ta ≤ 85 °C (+185 °F) Enclosure type E SIL 2 version: -40 °C (-40 °F) ≤ Ta ≤ 80 °C (+176 °F)
IP ingress protection	IP66 / IP67
Outputs	Analog, CANopen & SSI



R-Series RH / RP	
Stroke length	50...1650 mm (2...65 in.)
Marking	Ⓜ II 3G Ex nA IIC T4 Gc Ⓜ II 3D Ex tc IIIB T100°C Dc IP65/67
Operating temperature	-20 °C (-4 °F) ≤ Ta ≤ 75 °C (+221 °F)
IP ingress protection	RH: IP67 / RP: IP65
Outputs	Analog, CANbus & SSI



E-Series ET	
Marking	Ⓜ II 3G Ex nC IIC T4 Gc Ⓜ II 3D Ex tc IIIC T130 °C Dc Ⓜ Class I/II/III Div 2 T4 ABCDFG Class I Zone 2 T4 IIC Zone 22 AEx tc / Ex tc IIIC T130 Dc
Operating temperature	-40 °C (-40 °F) ≤ Ta ≤ 85 °C (+185 °F) (Analog) -40 °C (-40 °F) ≤ Ta ≤ 105 °C (+221 °F) (Start/Stop) -40 °C (-40 °F) ≤ Ta ≤ 194 °C (SSI)
IP ingress protection	IP66 / IP68
Outputs	Analog, Start/Stop & SSI

LOCAL SUPPORT WORLDWIDE



CUSTOMER SUPPORT
Our customer-focused experts are highly trained in both pre- and post-sales support. They will help you personally with questions about ordering and delivery times and work closely with our international team of sales engineers to provide you with a seamless customer experience.




APPLICATION SUPPORT
A team of highly qualified engineers with extensive practical knowledge is available to help you achieve the optimal solution – whether it is selecting the right sensor for your specific application or troubleshooting an existing installation.



INNOVATION WORKSHOP
MTS Sensors can partner with you to develop joint projects. Our workshops provide a forum for exchanging product and solution roadmaps that drive innovation and development. When we work together on creative solutions, we find that anything is possible.



START-UP & ON-SITE SERVICE
Our engineers provide exceptional support to guarantee smooth integration, ongoing performance and reliability for your sensor implementation. Local support, along with a network of distributors worldwide, enable on-site visits. Our goal is to increase your productivity and efficiency.



DIGITAL SUPPORT
We continually invest in new solutions and improved product performance. In addition, a wealth of technical documentation, CAD models and software updates are available through our website.

UNITED STATES Phone: +1 919 677-0100
MTS Systems Corporation E-Mail: info.us@mtssensors.com
Sensors Division

GERMANY Phone: +49 2351 9587-0
MTS Sensor Technologie E-Mail: info.de@mtssensors.com
GmbH & Co. KG

ITALY Phone: +39 030 988 3819
Branch Office E-Mail: info.it@mtssensors.com

FRANCE Phone: +33 1 58 4390-28
Branch Office E-Mail: info.fr@mtssensors.com

UNITED KINGDOM Phone: +44 79 44 15 03 00
Branch Office E-Mail: info.uk@mtssensors.com

CHINA Phone: +86 21 6485 5800
Branch Office E-Mail: info.cn@mtssensors.com

JAPAN Phone: +81 3 6416 1063
Branch Office E-Mail: info.jp@mtssensors.com

www.mtssensors.com

Image reference
background (cover) © casanova – Fotolia.com
beer bottles (p. 2) © Industrieblick – Fotolia.com
background (p. 4) © peshkov – Fotolia.com
background (p. 16, 17) © TTStudio – Fotolia.com
backgrounds (p. 18–35) © peshkov – Fotolia.com

Document Part Number: 551814 Revision D (EN) 04/2018

MTS, Temposonics and Level Plus are registered trademarks of MTS Systems Corporation in the United States; MTS SENSORS and the MTS SENSORS logo are trademarks of MTS Systems Corporation within the United States. These trademarks may be protected in other countries. All other trademarks are the property of their respective owners. Copyright © 2018 MTS Systems Corporation. No license of any intellectual property rights is granted. MTS reserves the right to change the information within this document, change product designs, or withdraw products from availability for purchase without notice. Typographic and graphics errors or omissions are unintentional and subject to correction. Visit www.mtssensors.com for the latest product information.

ISO 9001
CERTIFIED



Reg.-No. 033095-QM08

